

| | | | | |
|----------------------------|---|----------------|---------------------------|--------------------|
| 6.6.3 | Hydraulics In channels - A20 | | | POLYSAN® |
| Page 1 of 1 | | | | |
| Created: 16/12 2015 | By: HK | Rev: 01 | Rev.date: 8/8-2019 | Rev. by: HK |

Channel Capacity

$$Q = \frac{1}{n} \times \frac{A^{5/3}}{P^{2/3}} \times S^{0,5}$$

Q= The total discharge (m³ /s)


A=The Total area (section wise) of the channel

P = Wetted perimeter of the channel

S is the longitudinal slope of the channel

n = The Manning roughness coefficient.

Assumptions: 100% filled, clean, new channels, calculated with a 5‰ slope.

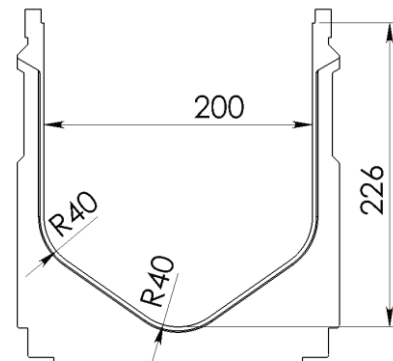

Note that this is channel capacities. If mounted with a grate or a reduced outlet, these can be reducing capacity, depending on their shape and size.

Example:

A20-15.0:

Width = 200 mm, R=40mm, Internal height total = 226 mm, n = 0,007 gives the below results:

$$Q = \frac{1}{0,007} \times \frac{(0.03972505)^{\frac{5}{3}}}{(0.53046979)^{\frac{2}{3}}} \times 0,005^{0,5} \approx 0,07129416$$

Max. Outlet is 71,3 l/s